

# TRANSPLAST Compression fitting



Our compression fitting, TRANSPLAST is specially designed for the telecommunications sector:

Characteristics:

- Transparent body to enhance cable installation.
- Easy and fast installation, just loosen slightly the nuts, insert the pipes and tighten again.
- No loss of components as you do not need to loosen the nut completely.
- Available: Couplers & End Caps


Ø mm	Units/Box	Weight x box KG	Box type & Volume / box m <sup>3</sup>	Jerk force	Max. Pull-Out Force	Max. Blowing Pressure (bar)
				(KG)	(KG)	
16	50	3.80	C 0.019	110	199	16
20	50	3.55	C 0.019	127	204	16
25	40	3.70	C 0.019	163	251	16
32	25	3.66	C 0.019	263	310	16
40	13	3.26	C 0.019	420	523	16
50	15	6.09	B 0.037	650	748	16
63	17	13.04	A 0.074	1032	1095	16



# Compression fitting TRANSPLAST

## COMPONENTS

- 1 Body
- 2 O-ring
- 3 Grip ring
- 4 Compression ring
- 5 Nut

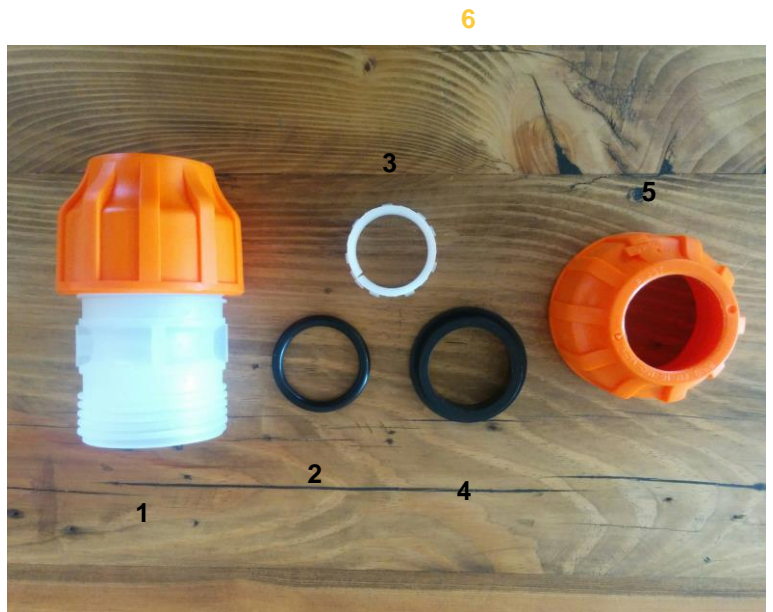

PLASTIC FITTING MATERIALS			
	Material	MRS Mpa	Specified design stress S Mpa
PP-B	Nut	8	6,3
	Body		
	Compression ring		
POM	Grip ring	10	6,3
NBR	O-ring		