

WT



TANGENTIAL HELIX WATER METER


WT is an excellent solution for high-volume irrigation metering. Using a tangential helix, it offers good metrological performance, wide measuring range and excellent resistance over time, even when used with irrigation water. Easy readability thanks to its IP68 copper-glass register. Robust, long lasting and designed for the most challenging environments, it is suitable for both drinking and irrigation water. It can be equipped with the latest remote data transmission technologies.

FEATURES


- Woltmann tangential helix cold water meter
- Ideal for large volume irrigation applications
- Certified MID R 40
- DN: 50 to 200 mm
- Ready for reed switch pulse emitter (Dn 50 –125 mm 1P=100 L / Dn 150–200 mm 1P=1000 L)
- High protection against external magnetic fields
- Mineral glass lens
- Sealed register (IP68 copper/glass) to entirely prevent condensation issues
- Can be provided fitted with wired or radio communication module
- MID-certified also in the "delivery group" version (see specific illustrative material), and therefore part of a metering system that includes On-Off valve and flow limiter



TYPICAL ERROR CURVE

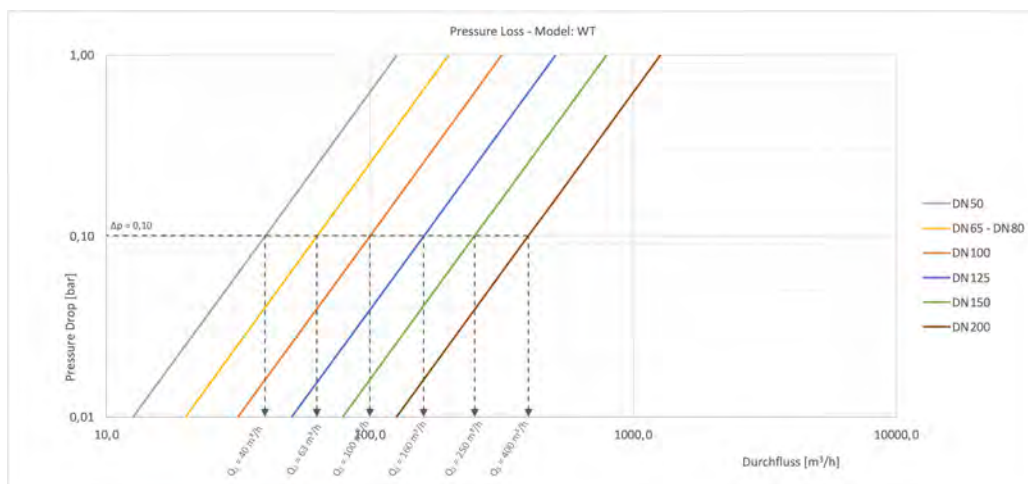

HEAD LOSS DIAGRAM

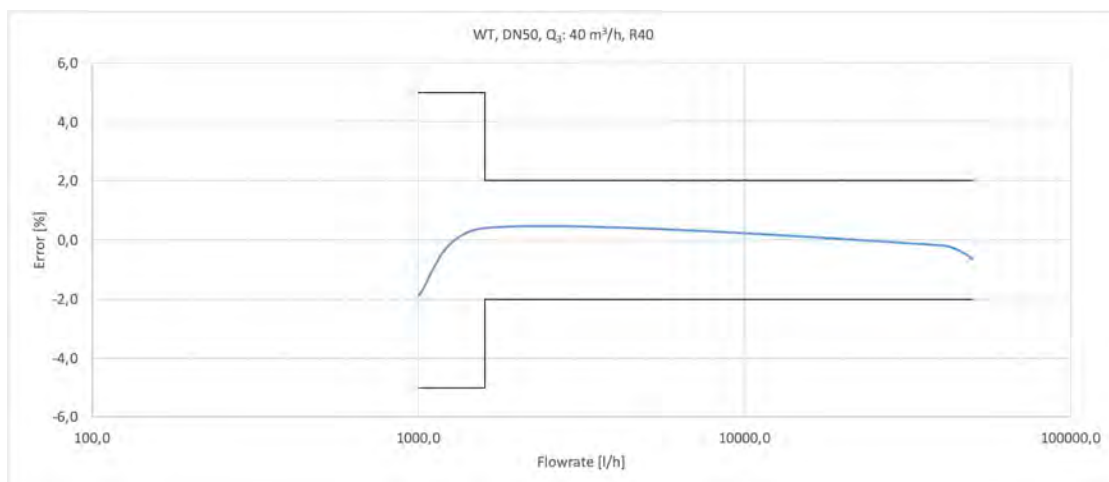

HYDRAULIC PERFORMANCE

Size	mm	50	65	80	100	125	150	200
	in	2	2 ½	3	4	5	6	8

Modulo B no. TCM 142/13-5129

Modulo D no. 0119-SJ-A010-08

$Q_3/Q_1 = R$
Referred to installation position H; V = 40

MID standard performance *

Q_3	m ³ /h	40	63	100	160	250	400
Q_4	m ³ /h	50	78,75	125	200	312,50	500

R 40

Q_1	l/h	1000	1575	2500	4000	6250	10000
Q_2	l/h	1600	2520	4000	6400	10000	16000

* Other values of R available upon request.

TECHNICAL DATA

Maximum permissible error
between Q_1 and Q_2 (excluded) +/- 5%

Maximum permissible error
between Q_2 (included) and Q_4 +/- 2% with water temperature $\leq 30^\circ\text{C}$

Temperature class T30

Flow profile sensitivity classes U0 - D0

Starting flow rate	l/h	125	190	320	450	700	1200	1800
--------------------	-----	-----	-----	-----	-----	-----	------	------

Head loss ΔP_{10}


Nominal pressure bar 16

Maximum reading	m ³	10.000.000					100.000.000	
-----------------	----------------	------------	--	--	--	--	-------------	--

Minimum reading	m ³	0,002					0,02	
-----------------	----------------	-------	--	--	--	--	------	--

Indicative weight	kg	10,9	12,7	14	16,2	21,5	29,1	42,6
-------------------	----	------	------	----	------	------	------	------

DIMENSIONS



Size	mm	50	65	80	100	125	150	200
	in	2	2 ½	3	4	5	6	8
Thread	in	G 2 B	G 2 ½ B	G 3 B	G 4 B	G 5 B	G 6 B	G 8 B
L	mm	200		225	250		300	350
H	mm	250	264	280	292	312	338	378
h	mm	136		186				206
B	mm	165	185	200	220	250	280	340

COMMUNICATION MODULES



ARROW^{EVO} 868
SPLIT



ARROW^{WAN} 169
SPLIT



ARROW^{WAN} 868
SPLIT



ARROW^{WAN} NB-IoT
SPLIT



REED SWITCH WOLTMANN