

PRODUCT SHEET

Multi Jet Water Meter

DESCRIPTION


Multi Jet Water Meters are ideal for sub/secondary billing for domestic applications, batch control and also water monitoring in industrial/commercial applications, borehole and irrigation.

It has working pressure up to 16bar, can be used in cold water up to 30°C and is available in ½" (13mm) and 2" (50mm) sizes.



TECHNICAL CHARACTERISTICS

- For hard, scaling, turbid or muddy waters
- Cold water up to 30°C
- Pulse rate option available 1/10/100 l/imp
- Suitable for horizontal and vertical installation
- Available for ½" (13mm) and 2" (50mm) pipe work
- Super dry dial register
- Nominal pressure 16bar
- Metallic lid with lock facility

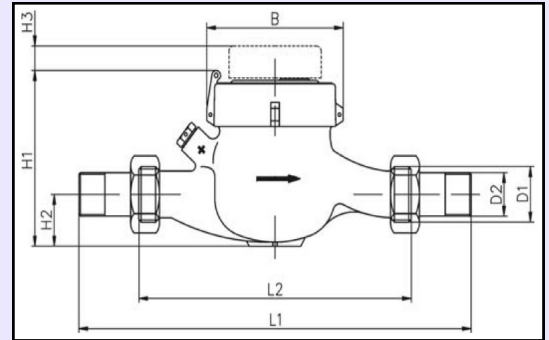

MAIN CHARACTERISTICS

Direct reading on five black rollers for cubic meters, as well as four spinning dials for litre consumption and super dial register.

DIMENSIONS & WEIGHTS

		15mm ½" Model	20mm ¾" Model	25mm 1" Model	30mm 1¼" Model	40mm 1½" Model	50mm 2" Model
MID Permanent flow	Q3 (m³/h)	2.5	4	6.3	10	16	n/a
EC Equivalent nominal flow	Qn (m³/h)	1.5	2.5	3.5	6	10	15
MID overload flow	Q4 (m³/h)	3.125	5	7.875	12.5	20	n/a
Connecting threads	D1 (Meter)	¾"	1"	1 ¼"	1 ½"	2"	2 ½"
	D2 (BSP)	½"	¾"	1!	1 ¼"	1 ½"	2"
Length	L1 (mm)	250	288	378	378	438	438
	L2 (mm)	165	190	260	260	300	300
Weight	Kg	1.4	1.8	2.7	2.7	5.4	7



www.youtube.com/geoquipwater



www.geoquipwatersolutions.com

geoquip water solutions limited

Unit 7, Sovereign Centre

Farthing Road Industrial Estate

Ipswich, IP1 5AP, ENGLAND

TEL: + 44 (0) 1473 462046

FAX: + 44 (0) 1473 462146

email: info@geoquipservices.co.uk